

# PI-43s

LIFT  
POSITION  
INDICATOR



PIXEL.  
TECHNOLOGIES

# PI-43s

LIFT  
POSITION  
INDICATOR

The Pi-43 offers all the essential elevator display information in full colour. Designed to be compact fitting into tight fixtures and COP's, with its high viewing angles, allowing both landscape or portrait mounting. Ideal for landing installs or the essential elevator colour display this screen is full of features, allowing complete programmable functions with intelligent gong and hall lantern outputs to trigger external devices. The display can be connected directly to both Pixel and KONE SPi data bus.



## SPECIFICATIONS

- Screen size - 4.3"
- LCD Display Type - TFT LCD
- Resolution (Pixels) - 480x272 / 16:9
- Viewing Area (wxh) (mm) - 95.5x54
- Power Supply: 24VDC @ 500mA typ.
- GONG/Hall Lantern Output: 2 @ 500mA max
- Dimensions (wxhxd) (mm): 68.5 x 127 x 18
- Lift Interface - Pixel 4 - Wire Serial / KONE SPI
- PC Interface - Pixel Serial

## FEATURES

### Standard Inclusions:

- Ⓜ 16 bit colour Display
- ⚡ Low power consumption
- ∠ Wide viewing angle
- 📺 Landscape / Portrait mounting
- ⬆️ Static / animated direction arrows
- 🔊 Gong & hall lantern outputs
- 🪟 Windows programmable
- ⚠️ Lift status messages
- 🖼️ Image background
- 🔕 Auto sleep mode
- 🔌 Pixel serial protocol
- 📡 Direct KONE SPI

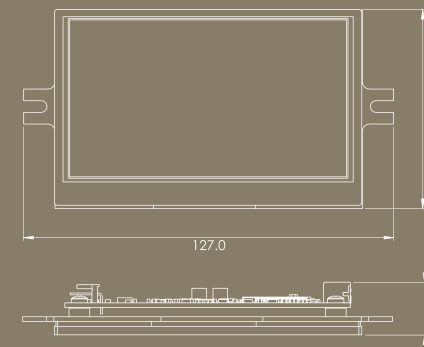



+61 3 8843 0700



[www.pixeltechnologies.com.au](http://www.pixeltechnologies.com.au)  
[info@pixeltechnologies.com.au](mailto:info@pixeltechnologies.com.au)



Melbourne | Sydney  
Brisbane | Singapore

© 2019 Pixel Technologies Pty Ltd  
Supplier No. E5405

Proudly Designed & Manufactured in Australia for the World

Pixel Technologies assumes no responsibility for any errors that may appear in this publication.  
All images are for illustration purposes only. Specifications are subject to change without prior notice.  
All information stated in the brochure is correct at time of printing and subject to change without notice.